



The ORIGINAL
LASH[®]
LEVEL ALIGN SPACE HOLD

Tile Leveling System

Patented 2-part System


For use with tile 1/4" to 7/16"

CLIPS



SIZE
Spaces tiles 1/16"

FAST & SIMPLE
Easy Snap-Off design

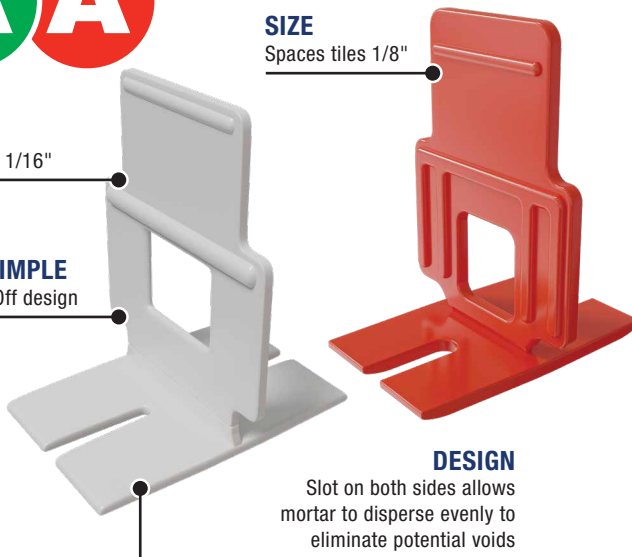

SIZE
Spaces tiles 1/8"


DESIGN

Slot on both sides allows mortar to disperse evenly to eliminate potential voids


WEDGES



EASY TO USE
Round back end for increased thumb comfort

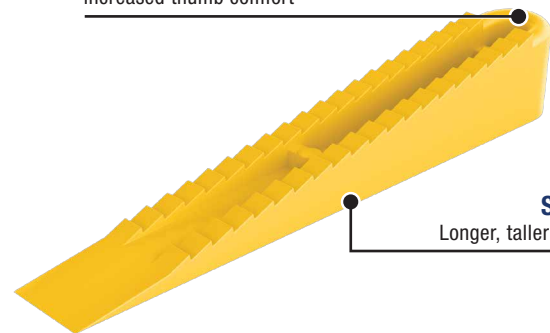

SLEEK
Longer, taller design

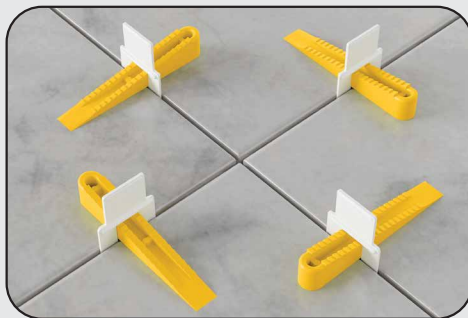

LEVEL

Anchor adjusts to the tiles so they remain level throughout the installation

ALIGN

Designed to address variations in tile thickness

SPACE

Produces a 1/16" or 1/8" wide grout joint between tiles

HOLD

Holds tiles firmly in place to ensure a lippage-free surface

Designed for quick installation, the LASH[®] Tile Leveling System reduces costly call backs by ensuring that the finished floor surface is lippage-free. It is the perfect system to use with large-format rectified porcelain, thin porcelain tile, marble and stone where narrow grout joints are required. This fast, simple system is the most cost effective installation method on the market to eliminate lippage.

The LASH System provides narrow 1/16" or 1/8" grout lines. For grout joints up to 1/4", traditional spacers can be used.

U.S. Patent No. 7,992,354



Professional Tools for Professional Results

qep.com

Y1624-12382

Easy to install and remove!

Type	Item #	Quantity
A 1/16"	99730	100/Bag (8/case)
	99731	300/Box (4/case)
	99790	500/Box (1/case)
	99740	1000 Bulk Box (50 boxes/pallet)
	99792	2000 Bulk Box (34 boxes/pallet)
A 1/8"	99781	100/Bag (8/case)
	99782	300/Box (4/case)
	99791	500/Box (1/case)
	99783	1000 Bulk Box (50 boxes/pallet)
	99793	2000 Bulk Box (34 boxes/pallet)
B Wedges	99726	100/Bag (8/case)
	99727	300/Box (4/case)
	99728	500/Box (1/case)
Installation Pliers	99784	(6/case)

Estimated Coverage*





Tile Size	100 Pack	300 Pack	500 Pack	1000 Pack
6" x 24"	25 ft ²	75 ft ²	125 ft ²	250 ft ²
12" x 24"	50 ft ²	150 ft ²	250 ft ²	500 ft ²
18" x 18"	56 ft ²	168 ft ²	280 ft ²	560 ft ²
24" x 24"	100 ft ²	300 ft ²	500 ft ²	1000 ft ²

*Coverage varies depending on tile installation pattern and tile quality

The LASH system should only be used with a minimum 1/4" x 3/8" x 1/4" square trowel notch to apply the setting material. Back buttering your tile is always recommended.


Speed up Installation with PRO Pliers



- Ensure wedges are set properly in the leveling clips every time (One to Two Clicks)
- Can also be used with the QEP Xtreme® Tile Leveling System and all similar Tile Leveling Systems

PERFORMANCE

Stop pin allows for proper pressure

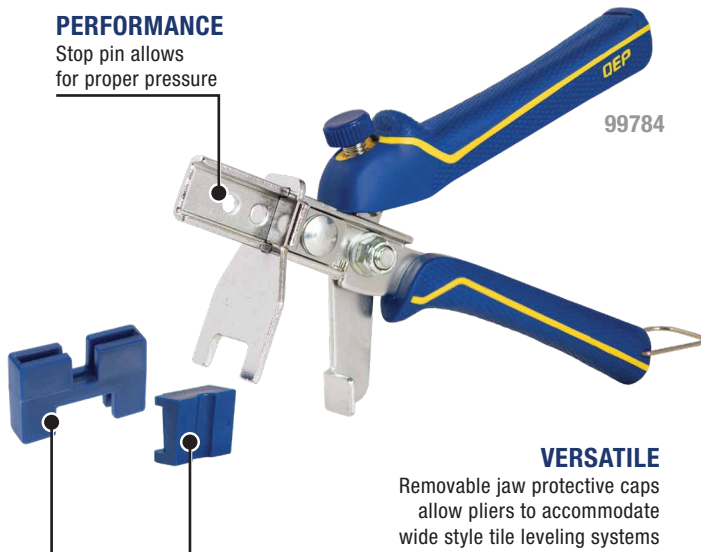

VERSATILE

Removable jaw protective caps allow pliers to accommodate wide style tile leveling systems

