




# Natural Cork Underlayment 6 mm

## 72000Q / 72003Q / 72005Q

### INSULATING

Reduces thermal transmission, increasing effectiveness of floor heating systems

**Valeur R**  
0.74

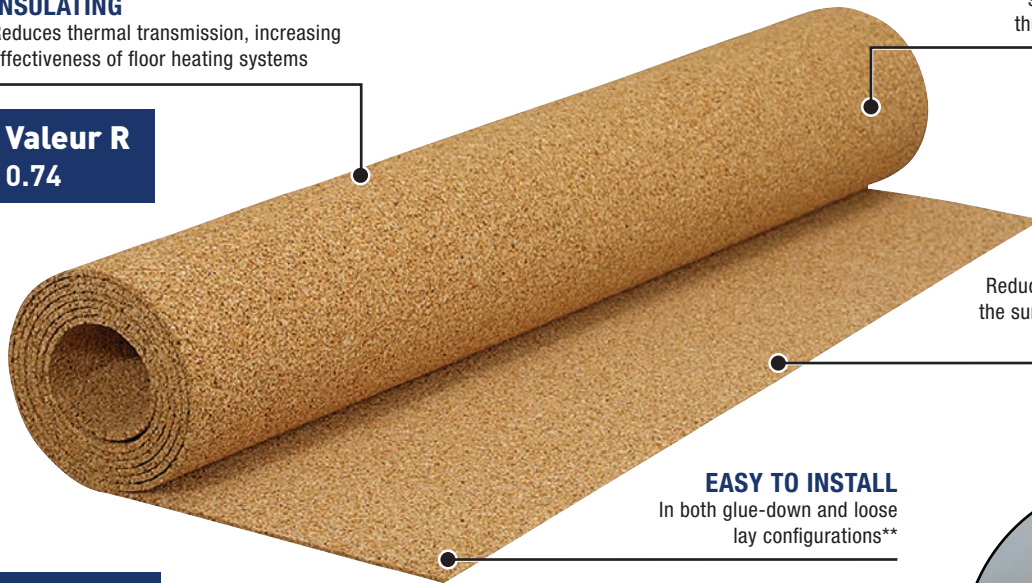

### CRACK SUPPRESSION

Acts as a crack isolation membrane that resists transfer of stress cracks from subfloor through to flooring surfaces

### SOUND ABSORBING

Reduces sound transmission from both the surface of a floor as well as through the floor to living spaces below

### EASY TO INSTALL


In both glue-down and loose lay configurations\*\*

**IIC STC Δ**  
74\* | 70\* | 22

\*Ceramic tile on a 6" concrete slab

### VERSATILE

For use under ceramic tile, stone, marble, glued wood flooring and floating floor systems

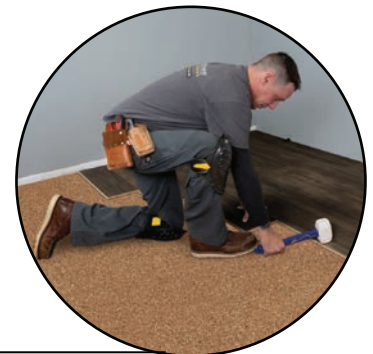

\*\*For a list of recommended adhesives to use for glue-down installations, please go to [qep.com](http://qep.com) or call 866-435-8665.

ITEM #	DESCRIPTION	QTY	SIZE	COVERAGE
72000Q	1/4" (6 mm) Roll	1 Roll	48"x50'	200 ft <sup>2</sup> / roll (48"x50')
72003Q	1/4" (6 mm) Roll	1 Roll	48"x25'	100 ft <sup>2</sup> / roll (48"x25')
72005Q	1/4" (6 mm) Sheets	5 sheets	2' x 3'	30 ft <sup>2</sup> /case (2' x 3')



Our Natural Cork products may contribute towards satisfying credits under the LEED® Green Building Program in the following areas:

- MR 4.1 - 5% Recycled Content of total building materials (post consumer + 1/2 of post industrial)
- MR 4.2 - 10% Recycled Content of total building materials (post consumer + 1/2 of post industrial)
- MR 6 - Specifying rapidly renewable building materials for 5% of total building materials.
- EQ 4.1 - Low Emitting Materials Adhesives & Sealants (Adhesives Specified meet SCAQMD Rule 1168)

Professional Tools for Professional Results

[qep.com](http://qep.com)

F2924-11851